

Technical sheet :

SE 1008

OXYGEN





 **MANITOU**
HANDLING YOUR WORLD

Capacities		Metric	Imperial
Working height maximum (indoor)	h21	9.99 m	32 ft 9 in
Working height maximum (outdoor)	h21'	9 m	29 ft 6 in
Floor height (access)	h20	1.25 m	4 ft 1 in
Platform height maximum (indoor)	h7	7.99 m	26 ft 3 in
Platform height maximum (outdoor)	h7'	7 m	23 ft
Platform capacity	Q	230 kg	507 lb
Max. capacity on the extension deck		115 kg	254 lb
Number of people (indoor / outdoor)		2 / 1	2 / 1
Weight and dimensions			
Platform weight*		2200 kg	4850 lb
Platform dimensions (length x width)	lp / ep	2.20 m x 0.79 m	7 ft 3 in x 2 ft 7 in
Platform dimensions with extension (length x width)		3.10 m x 0.79 m	10 ft 2 in x 2 ft 7 in
Overall length	l1	2.42 m	7 ft 11 in
Overall width	b1	0.82 m	2 ft 8 in
Overall height	h17	2.17 m	7 ft 1 in
Overall height (stowed)	h18 ***	1.98 m	6 ft 6 in
Deck opening length	dp	0.90 m	2 ft 11 in
Overall length with platform extension	l15	3.31 m	10 ft 10 in
Outside turning radius - platform	Wa2	2.17 m	7 ft 1 in
Ground clearance with pothole guards deployed	m6	0.02 m	1 in
Ground clearance with pothole guards folded	m2	0.08 m	3 in
Wheelbase	y	1.75 m	5 ft 9 in
Performances			
Drive speed - stowed		4.50 km/h	3 mph
Drive speed - raised		0.80 km/h	0.50 mph
Raise speed (laden) / Lower speed (laden)		33 s / 32 s	33 s / 32 s
Gradeability		25 %	25 %
Indoor and outdoor max Tilt Rating (Fore and Aft / Side-to-Side)		3.50 ° / 1.50 °	3.50 ° / 1.50 °
Wheels			
Tires type		Non marking	Non marking
Standard tires		15 x 5 in / 381 x 125 mm	15 x 5 in / 381 x 125 mm
Drive wheels (front / rear)		2 / 0	2 / 0
Steering wheels (front / rear)		2 / 0	2 / 0
Braking wheels (front / rear)		2 / 0	2 / 0
Service brake		Electric	Electric
Engine/Battery			
Battery technology		Lead acid	Lead acid
Battery voltage		6 V	6 V
Number of batteries / Battery nominal voltage / Battery capacity		4 / 6 V / 185 Ah	4 / 6 V / 185 Ah
Battery energy		4.40 kWh	4.40 kWh
On-board charger (V / A)		24 V / 30 A	24 V / 30 A
Miscellaneous			
Hydraulic Pressure		250 bar	3626 PSI
Hydraulic tank capacity		24 l	6 US gal
Vibration on hands/arms		< 0.50 m/s²	< 0.50 m/s²
Standards compliance			
This machine is in compliance with:		2006/42/CE European standard: EN 280 + A1 2015 - EMC: 2014/30/EU - Noise directive: 2000/14/CE - Safety of machinery: EN ISO 13849-1: 2008	2006/42/CE European standard: EN 280 + A1 2015 - EMC: 2014/30/EU - Noise directive: 2000/14/CE - Safety of machinery: EN ISO 13849-1: 2008


*Varies according to options and standards of the country to which the machine is delivered

*** With folded guardrail

SE 1008 - Load chart

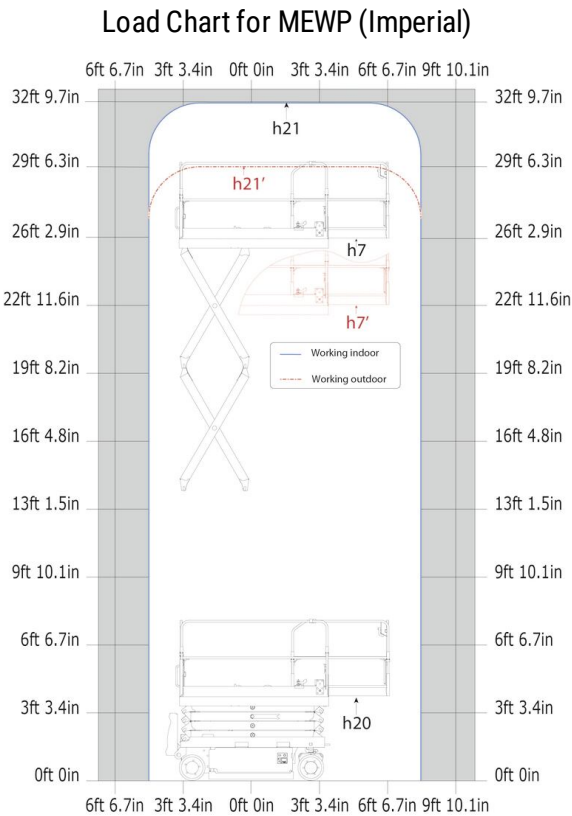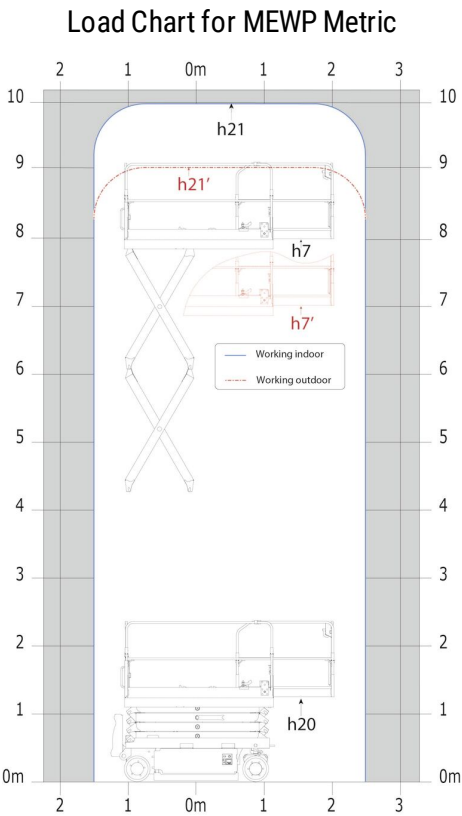

SE 1008 - Dimensional drawing

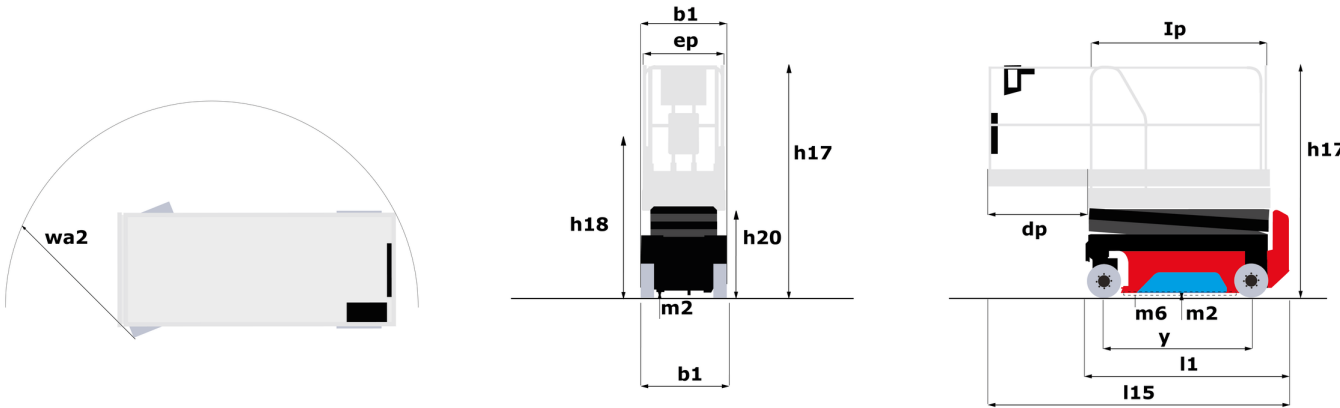

Equipment

Standard

2 swing out component trays (hydraulic/electric)
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)
Battery - 24V - 185Ah - semi-traction
Battery charge indicator lamp
CAN bus technology
Colour screen with integrated diagnostics
Descent alarm
Easy Link with 2 year Service
Electrical front wheel brake
Emergency stop button in platform and on frame
Folding rails with full height access gate
Hom in the platform
Hour meter
Management of working height according to working place (indoor/outdoor)
Manual emergency lowering
Multi-voltage on-board charger - 24V - 30A - Single-phase
Side and rear forklift pockets
Sliding basket extension - 90 cm

Optional

Audio warning on all motion
Audio warning on translation
Biodegradable hydraulic oil - Grade 32
Easy Link - With access control keypad
Easy link - With remote lock
Electric plug - 110 or 230V - In the basket - With differential circuit breaker - European type
Safety kit - Harness + helmet
Working light (x1) on basket



Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes